




CEILING BOOM Z-series

Original New Concept in Car Washing

DKZ_{os}

stainless steel

Greater Convenience, unique setup of the two ceiling booms (DKZ) means double benefit for the carwash customer through 2 x 360° boom rotation (one boom for the pressure wand, the other for the foam brush)

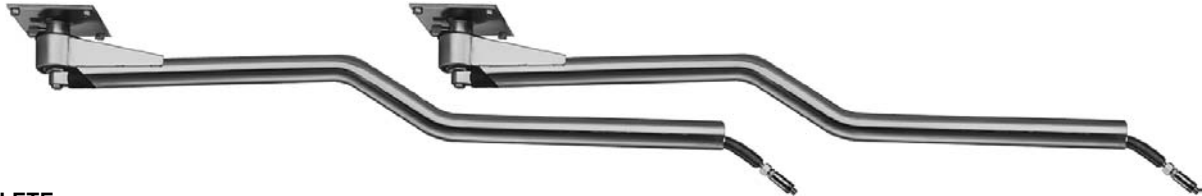

COMPLETE

Mosmatic ceiling boom (DKZ) ready for installation, with integrated SMAR T-Tech® swivels, axle with dual "perma-lube" ball bearings, insulated high pressure hose

VERSIONS AVAILABLE

Stainless Steel, polished
 Stainless Steel, plain

SERVICE-FRIENDLY

easy access to all components keeps maintenance short and simple

SAFETY



tension relief and hose guard protect armatures and hoses

RUGGED CONSTRUCTION

high quality stainless steel tubing guarantees strength and stability

CEILING BOOM Z-SERIES DKZ_s

<i>Stainless Steel, polished</i>			
Part No.	Length (L)	Weight	Inlet / Outlet
65.009	4' 9"	22 lbs	3/8"NPT-fem.
65.019	5' 1"	23 lbs	3/8"NPT-fem.
65.029	5' 5"	24 lbs	3/8"NPT-fem.
65.039	5' 9"	26 lbs	3/8"NPT-fem.

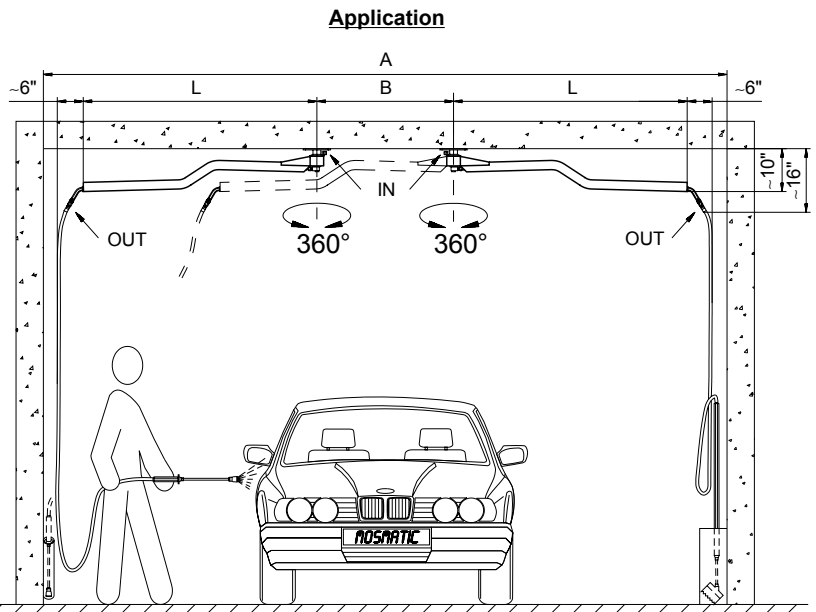

Mounting Plate, **Part No. 65.910**, to install two Z-Booms on one center beam

A = minimum width
 B = minimum axle width
 L = boom arm length

A	B	L
14' 1"	33.5"	4' 9"
15' 1"	35.5"	5' 1"
16' 1"	37.5"	5' 5"
17' 1"	39.5"	5' 9"

Other versions or sizes upon request

Technical Data

Boom Arm	Mounting Plate
Throughput Medium: water, oil, compressed air, pH 3-12	Dimensions: 7.087" x 7.087"
Rotation: 360° (infinite)	Thickness: 0.315"
Pressure: 2200 psi	Hole Spacing: 5.906" x 5.906"
Temperature: 200° F	Hole Diameter: 0.551" (4x)
	<i>Fastening: per Hole at least 30'000 N</i>

