




CEILING BOOM Z-series

DKZ_{0s}

SETUP for Triple Foam System - Regular Ceiling

stainless steel

Greater Convenience, unique setup of the three ceiling booms (DKZ) means triple benefit for the carwash customer through 3 x 360° boom rotation (one boom for the pressure wand, one for the foam brush and the third for the triple foam/wax application)

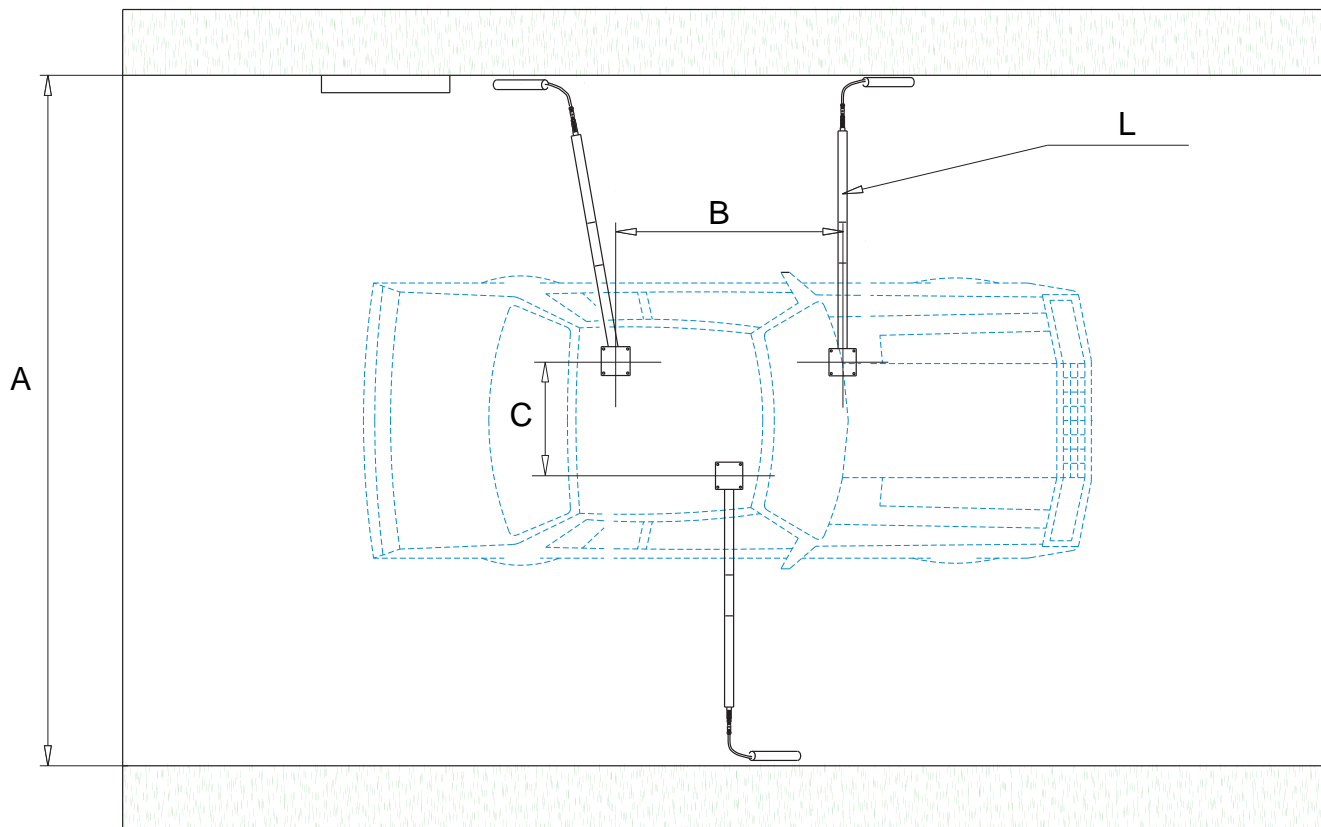

A = minimum width
 B = minimum distance
 C = minimum distance
 L = boom arm length

A	B	C	L
14'	4' 7"	2' 4"	4' 9"
15'	4' 11"	2' 6"	5' 1"
16'	5' 3"	2' 8"	5' 5"
17'	5' 7"	2' 10"	5' 9"

CEILING BOOM Z-SERIES DKZ_{0s} - Part No. and weight is for SET OF TWO BOOMS

<i>stainless steel, polished</i>			
Part No.	Length (L)	Weight	Inlet / Outlet
65.003	4' 9"	21.1 lbs	3/8"NPT-fem.
65.013	5' 1"	22.4 lbs	3/8"NPT-fem.
65.023	5' 5"	23.8 lbs	3/8"NPT-fem.
65.033	5' 9"	25.1 lbs	3/8"NPT-fem.

<i>stainless steel, plain</i>			
Part No.	Length (L)	Weight	Inlet / Outlet
65.303	4' 9"	21.1 lbs	3/8"NPT-fem.
65.313	5' 1"	22.4 lbs	3/8"NPT-fem.
65.323	5' 5"	23.8 lbs	3/8"NPT-fem.
65.333	5' 9"	25.1 lbs	3/8"NPT-fem.

Technical Data

Boom Arm	Mounting Plate
Throughput Medium: water, oil, compressed air, pH 3-12	Dimensions: 7.087" x 7.087"
Rotation: 360° (infinite)	Thickness: 0.315"
Pressure: 2200 psi	Hole Spacing: 5.906" x 5.906"
Temperature: 200° F	Hole Diameter: 0.551" (4x)
	Fastening: per Hole at least 30'000 N

